

How to setup DM-531 X-Band Controller

- 1) Disable all alert tones in both radios (DP4000 and TLK100i) and turn off MIC AGC in DP4000.




- 2) Adjust both radios to 50% volume.



Audio Accessory setting in DP4000

Volume Control	<input checked="" type="checkbox"/>
Analog Accessory Mic Gain (dB)	<input type="text" value="20"/>
Digital Accessory Mic Gain (dB)	<input type="text" value="31"/>
Debounce Duration (ms)	<input type="text" value="0"/>
Cable Type	<input type="text" value="Generic"/>

- 3) Connect the cables to both radios and switch on the DM-531 X-band controller in position 2.

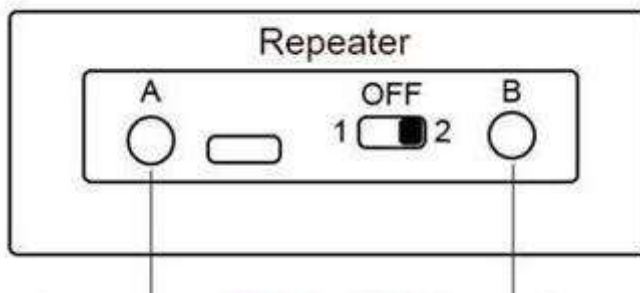

- 4) Select the correct channel on both radios and you are good to go.